
CILINDRO
76907

Typ 76907-a

ANETA LIGHTING
LIGHTS FOR HOME AND WORK SINCE 1947

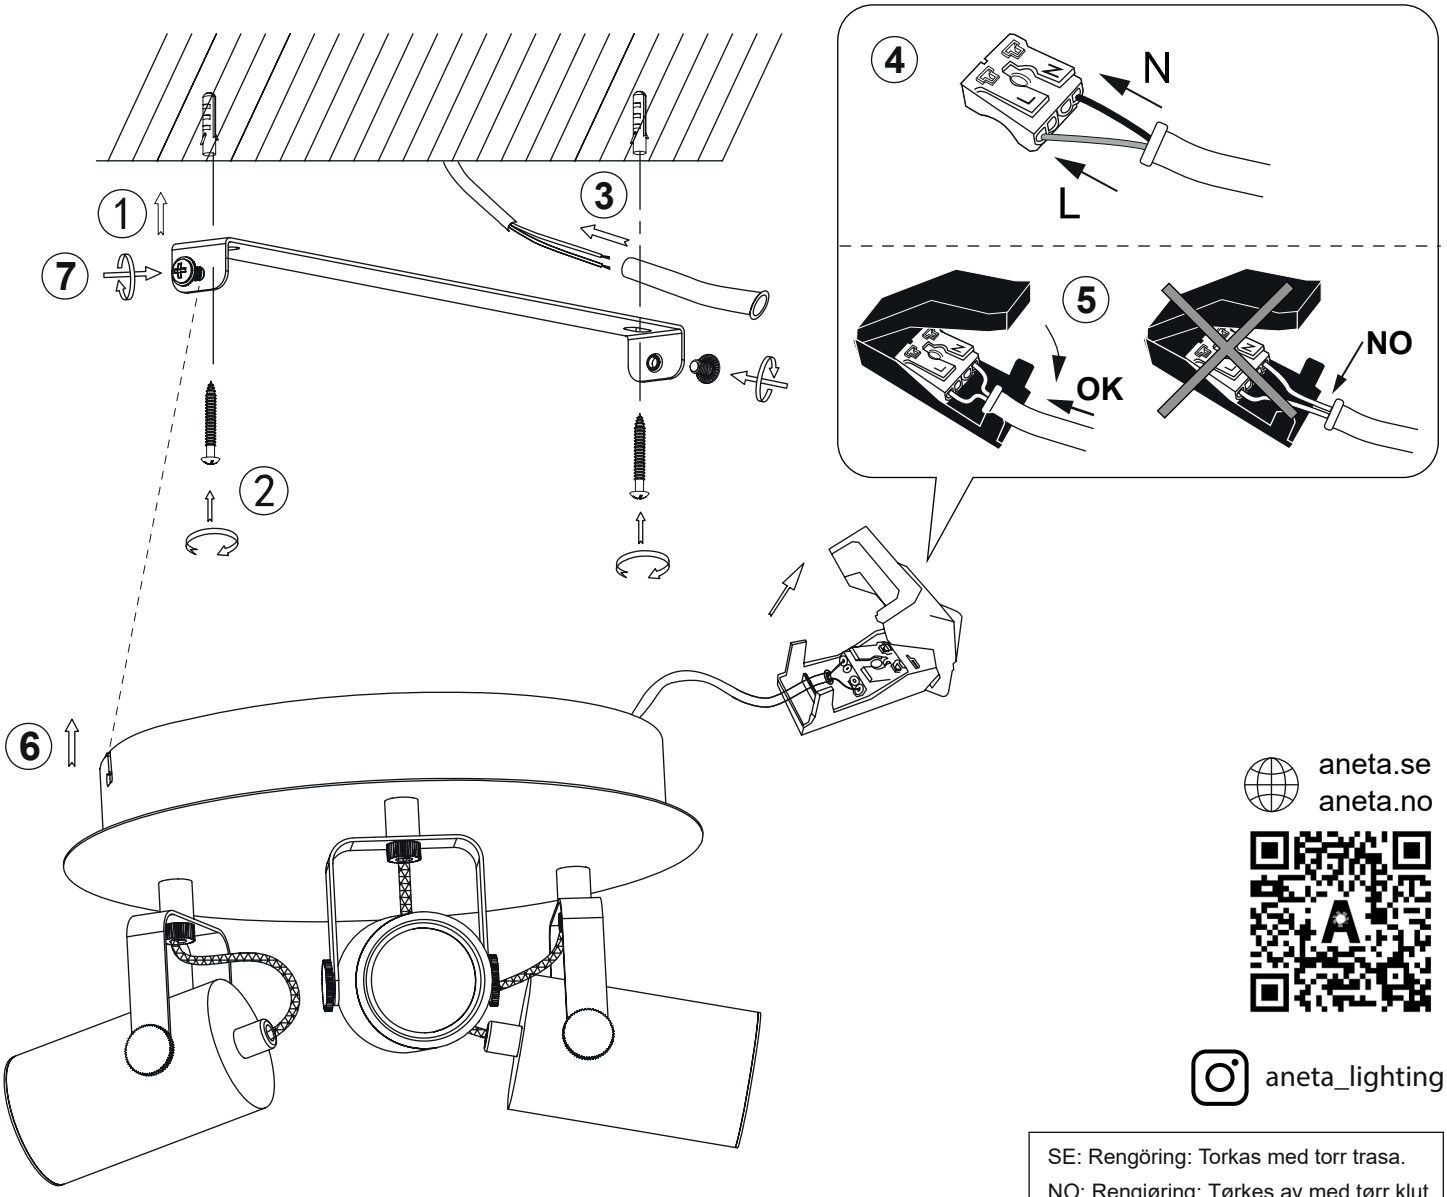

aneta.se
aneta.no

aneta_lighting

SE: Rengöring: Torkas med torr trasa.
NO: Rengjøring: Tørkes av med tørr klut.
FI: Puhdistus: Pyyhi kuivalla liinalla.
EN: Cleaning: Wipe with a dry cloth.

SE: Denna produkt innehåller tre ljuskällor med energieffektivitetsklass F.
Diodelyskilden kan skiftes som reservdel.
50000 tim ≈ 20 år (6 tim/dag)

NO: Dette produktet inneholder tre lyskilder med energieffektivitetsklasse F.
Lysdioden är utbytbar som reservdel.
50000 tim ≈ 20 år (6 tim/dag)

FI: Tämä tuote sisältää kolme valonlähdettä,
joidenenergiatehokkuusluokka on F.
LED valolähde vaihdetta vissa, löytyy varaosana.
50 000 tuntia ≈ 20 vuotta (6 t/päivä)

EN: This product contains three light sources of energy efficiency class F.
The LED-chip is exchangeable as a spare part.
50000 h ≈ 20 years (6 h/day)

Light Source data (1 pce):

Lighting technology used:	LED
Mains or non-mains:	non-mains
Directional or non-directional:	non-directional
Connected L.S.:	no
Color-tuneable:	no
Envelope:	no
High luminance:	no
Anti-glare shield:	no
Dimmable:	yes
Energy consumption in on-mode:	6 kWh / 1000 h
Energy efficiency class (A-G):	F
Useful luminous flux:	600 lm *
CCT colour temperature:	3000 K
On-mode power:	5,8 W
Stand-by power:	N/A
Networked standby power:	N/A
CRI:	≥ 80
R9 color rendering index:	1
sdcm:	< 6
Chromaticity coordinates (X, Y):	0.440, 0.403
Lifetime $L_{70}B_{50}$:	50 000 hours
Lumen maintence factor:	0.90
Survival factor:	0.96
Power supply input:	600 mA ~9,5VDC

* The luminous flux stated here is the value for the light source itself in accordance with Regulation (EU) 2019/2015. The luminous flux stated on the packing box is for the lighting fitting, where the light from the light source is partly absorbed by glass/glare shield/shade and parts of the fitting, and is therefore lower than for the light source.